

ATC // AVX TL MIM

Transmission Line

Metal-Insulator-Metal Capacitor

ATC//AVX Thin Film Technologies is pleased to introduce a novel MIM (Metal-Insulator-Metal) capacitor using a transmission line wire bond pad structure with backside ground. This structure provides a unique RF / microwave solution not available from traditional SLC structures.

The TL MIM can be supplied on quartz, alumina, glass and other substrates to minimize losses. Copper traces are used for optimal conductivity. Front and backside gold metalization make this device suitable for epoxy, gold wire bond / ribbon bond attachment techniques..



Capacitor Materials

Material	SiON
Rated Voltage	≤100
DF	≤0.1%
TCC	±60 ppm/°C
Specific Capacitance*	50 to 100 pF/mm ²


*Actual maximum capacitance values depend on transmission line dimensions.

Features

- Various substrates for optimized RF/microwave performance
- HFSS optimized design unique for each device
- Copper conductor design for improved circuit conductivity
- Gold wire bondable for high reliability applications
- RoHS compliant

Test Methods

Specification	Parameter	Method or Paragraph	Limit
MIL-STD-883	Bond Strength	2011.8	>3 gm min. w/ .001" Au Wire
MIL-STD-883	Shear Strength	2018	Size dependant See procedure
MIL-STD-202	Life	108	1000 hrs @ 125°C w/ 2 x rated voltage

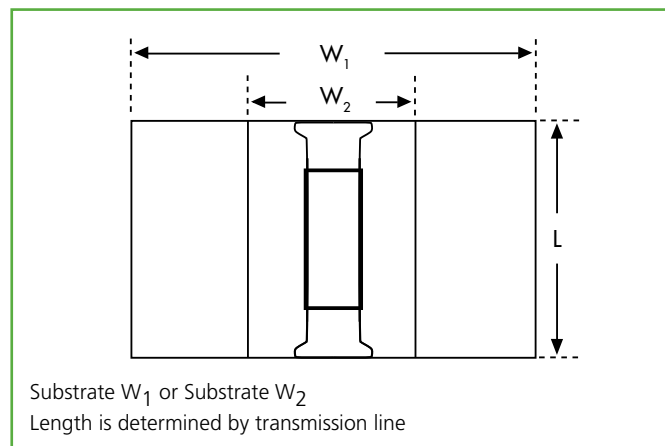

AMERICAN TECHNICAL CERAMICS

ATC // AVX Thin Film Technologies

ATC North America

tfsales@atceramics.com

sales@atceramics.com

THE ENGINEERS' CHOICE™

www.atceramics.com



ISO 9001 REGISTERED COMPANY

TL MIM TRANSMISSION LINE METAL INSULATOR-METAL CAPACITOR

Kit Values

Part Number	Substrate	Length (mils)	Width (mils)	Thickness (mils)	Cap Value (pF)
TM0404C1R0MQAW	Quartz	40	40	5	1
TM0404C5R0MQAW	Quartz	40	40	5	5
TM0404C150MQAW	Quartz	40	40	5	15
TM0204C1R0MQAW	Quartz	20	40	5	1
TM0304C150MABW	Alumina	30	40	10	15
TM0402C150MAAW	Alumina	40	20	5	15
TM0802C150MAAW	Alumina	80	20	5	15
TM0804C1R0MABW	Alumina	80	40	10	1
TM0804C150MABW	Alumina	80	40	10	15
TM3204C150MABW	Alumina	320	40	10	15
TM0404C150MABW	Alumina	40	40	10	15

How to Order

TM	04	02	C	N	150	M	Q	A	W
Series Code	Substrate Length	Substrate Width	Working Voltage	Standard Impedance	Capacitance	Capacitance Tolerance	Substrate	Substrate Thickness (mils)	Packaging
TM = MIM	in tens of mils	in tens of mils	C = 25 WVDC X = Other Contact Factory	A = 50 Ω X = Other, Contact Factory	capacitance code in pF First two digits = significant figures or R for decimal place. Third digit - number of zeros or after "R" significant figures.	M = ±20%	A = Alumina, Q = Quartz G = Glass X = Other, Contact Factory	A = 5 mils B = 10 mils C = 15 mils X = Contact factory	W = antistatic waffle pack T= tested, undiced D - Tested and diced on tape

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. A 10/03). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product line without prior notice.

© 2013 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-1130 Rev. B; 7/14



AMERICAN TECHNICAL CERAMICS

ATC // AVX Thin Film Technologies

ATC North America

tfsales@atceramics.com

sales@atceramics.com



ISO 9001 REGISTERED COMPANY

THE ENGINEERS' CHOICE™

www.atceramics.com