

ATC 100 B Series Porcelain Superchip® Multilayer Capacitors

- Case B Size (.110" x .110")
- High Q
- Low ESR/ESL
- Low Noise
- Available with Encapsulation Option*
- Capacitance Range 0.1 pF to 1000 pF
- Ultra-Stable Performance
- High Self-Resonance
- Established Reliability (QPL)
- Extended WVDC up to 1500 VDC

ATC, the industry leader, offers new improved ESR/ESL performance for the 100 B Series RF/Microwave Capacitors. This Series is now available with extended operating temperatures up to 175°C. High Density porcelain construction provides a rugged, hermetic package.

ATC offers an encapsulation option for applications requiring extended protection against arc-over and corona.

Typical functional applications: Bypass, Coupling, Tuning, Feedback, Impedance Matching and DC Blocking.

Typical circuit applications: UHF/Microwave RF Power Amplifiers, Mixers, Oscillators, Low Noise Amplifiers, Filter Networks, Timing Circuits and Delay Lines.

*For leaded styles only.

ENVIRONMENTAL TESTS

ATC 100 B Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK: MIL-STD-202, Method 107, Condition A.

MOISTURE RESISTANCE: MIL-STD-202, Method 106.

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:

High Rel Products:


MIL-STD-202, Method 108, for 2000 hours, at 125°C. 200% WVDC applied

Extended Voltage Products:

Voltage Applied:

0.1 pF to 47 pF at WVDC

51 pF to 200 pF at 120% of WVDC

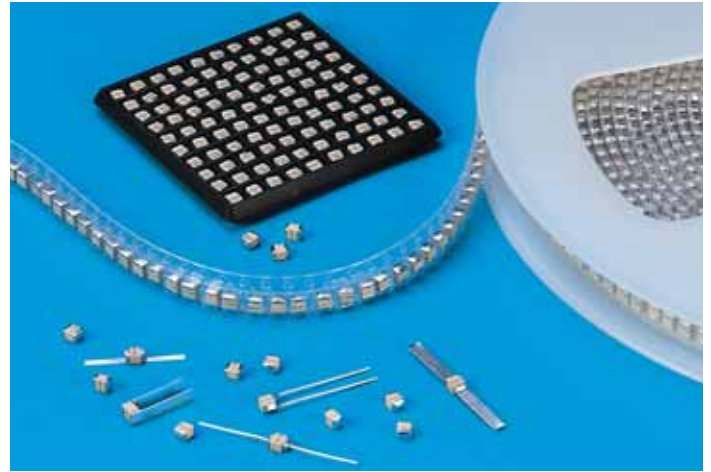

ELECTRICAL AND MECHANICAL SPECIFICATIONS

QUALITY FACTOR (Q): greater than 10,000 at 1 MHz.

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):

+90 ±20 PPM/°C (-55°C to +125°C)
+90 ±30 PPM/°C (+125°C to +175°C)

INSULATION RESISTANCE (IR):

0.1 pF to 470 pF:

10⁶ Megohms min. @ +25°C at rated WVDC.
10⁶ Megohms min. @ +125°C at rated WVDC.

510 pF to 1000 pF:

10⁵ Megohms min. @ +25°C at rated WVDC.
10⁴ Megohms min. @ +125°C at rated WVDC.

IR above +125°C is derated by one order of magnitude.

WORKING VOLTAGE (WVDC): See Capacitance Values Table, page 2.

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

250% WVDC for WVDC ≤ 500 Volts
150% WVDC for WVDC > 500 Volts or ≤ 1250 Volts
120% WVDC for WVDC > 1250 Volts
Test voltage is applied for 5 secs.

RETRACE: Less than ±(0.02% or 0.02 pF), whichever is greater.

AGING EFFECTS: None

PIEZOELECTRIC EFFECTS:

None
(No capacitance variation with voltage or pressure).

CAPACITANCE DRIFT: ±(0.02% or 0.02 pF), whichever is greater.

OPERATING TEMPERATURE RANGE:

Standard WVDC:

0.1 to 330 pF: from -55°C to +175°C
360 to 1000 pF: from -55°C to +125°C

Extended WVDC:

0.1 to 1000 pF: from -55°C to +125°C
(No derating of working voltage).

TERMINATION STYLES:

Available in various surface mount and leaded styles.
See Mechanical Configurations, page 3.

TERMINAL STRENGTH: Terminations for chips and pellets withstand a pull of 5 lbs. min., 15 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



AMERICAN TECHNICAL CERAMICS

ATC North America
+1-631-622-4700
sales@atceramics.com

ATC Europe
+46 8 6800410
sales@atceramics-europe.com

ATC Asia
+86-755-2386-8759
sales@atceramics-asia.com

THE ENGINEERS' CHOICE®
ISO 9001 REGISTERED

www.atceramics.com

ATC # 001-807 Rev. L 1/08

ATC 100 B Capacitance Values

| CAP. CODE | CAP. (pF) | TOL. | RATED WVDC | | CAP. CODE | CAP. (pF) | TOL. | RATED WVDC | | CAP. CODE | CAP. (pF) | TOL. | RATED WVDC | | CAP. CODE | CAP. (pF) | TOL. | RATED WVDC | |
|-----------|-----------|---------|------------|------|-----------|-----------|---------|------------|------|-----------|-----------|---------------|------------|------|-----------|-----------|---------------|------------|------|
| | | | STD. | EXT. | | | | STD. | EXT. | | | | STD. | EXT. | | | | STD. | EXT. |
| 0R1 | 0.1 | B | 500 | 1500 | 2R4 | 2.4 | B, C, D | 500 | 1500 | 200 | 20 | F, G, J, K, M | 500 | 1500 | 151 | 150 | F, G, J, K, M | 300 | 1000 |
| 0R2 | 0.2 | B, C | | | 2R7 | 2.7 | | | | 220 | 22 | | | | 161 | 160 | | | |
| 0R3 | 0.3 | | | | 3R0 | 3.0 | | | | 240 | 24 | | | | 181 | 180 | | | |
| 0R4 | 0.4 | 3R3 | | | 3.3 | 270 | | | | 27 | 201 | | | | 200 | | | | |
| 0R5 | 0.5 | B, C, D | | | 3R6 | 3.6 | | | | 300 | 30 | | | | 221 | 220 | | | |
| 0R6 | 0.6 | | | | 3R9 | 3.9 | | | | 330 | 33 | | | | 241 | 240 | | | |
| 0R7 | 0.7 | | | | 4R3 | 4.3 | | | | 360 | 36 | | | | 271 | 270 | | | |
| 0R8 | 0.8 | | | | 4R7 | 4.7 | | | | 390 | 39 | | | | 301 | 300 | | | |
| 0R9 | 0.9 | | | | 5R1 | 5.1 | | | | 430 | 43 | | | | 331 | 330 | | | |
| 1R0 | 1.0 | | | | 5R6 | 5.6 | | | | 470 | 47 | | | | 361 | 360 | | | |
| 1R1 | 1.1 | | | | 6R2 | 6.2 | | | | 510 | 51 | | | | 391 | 390 | | | |
| 1R2 | 1.2 | | | | 6R8 | 6.8 | | | | 560 | 56 | | | | 431 | 430 | | | |
| 1R3 | 1.3 | 7R5 | | | 7.5 | 620 | | | | 62 | 471 | | | | 470 | | | | |
| 1R4 | 1.4 | 8R2 | | | 8.2 | 680 | | | | 68 | 511 | | | | 510 | | | | |
| 1R5 | 1.5 | 9R1 | | | 9.1 | 750 | | | | 75 | 561 | | | | 560 | | | | |
| 1R6 | 1.6 | 100 | | | 10 | 820 | | | | 82 | 621 | | | | 620 | | | | |
| 1R7 | 1.7 | 110 | 11 | 910 | 91 | 681 | 680 | | | | | | | | | | | | |
| 1R8 | 1.8 | 120 | 12 | 101 | 100 | 751 | 750 | | | | | | | | | | | | |
| 1R9 | 1.9 | 130 | 13 | 111 | 110 | 821 | 820 | | | | | | | | | | | | |
| 2R0 | 2.0 | 150 | 15 | 121 | 120 | 911 | 910 | | | | | | | | | | | | |
| 2R1 | 2.1 | 160 | 16 | 131 | 130 | 102 | 1000 | | | | | | | | | | | | |
| 2R2 | 2.2 | 180 | 18 | | | | | | | | | | | | | | | | |

VRMS = 0.707 X WVDC

• SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. • ENCAPSULATION OPTION AVAILABLE. PLEASE CONSULT FACTORY.

NOTE: EXTENDED WVDC DOES NOT APPLY TO CDR PRODUCTS.

ATC PART NUMBER CODE

ATC100 B 91 0 J W 500 X C

Series _____

Case Size _____

Capacitance Code: _____
 First 2 significant digits for capacitance.
 R=Decimal Point

Indicates number of zeros following digits _____
 of capacitance in picofarads except for decimal values.

Capacitance Tolerance _____

| CAPACITANCE TOLERANCE | | | | | | | | |
|-----------------------|---------|----------|---------|-----|-----|-----|------|------|
| Code | B | C | D | F | G | J | K | M |
| Tol. | ±0.1 pF | ±0.25 pF | ±0.5 pF | ±1% | ±2% | ±5% | ±10% | ±20% |

_____ Packaging

_____ T - Tape and Reel, 1000 pc. qty.*

_____ TV - Vertical Orientation of Product, Tape and Reel, 1000 pc. qty.*

_____ C - ATC Cap-Pac®, 100 pc. qty. std.*

_____ I - Special Packaging. Consult Factory.

*Consult ATC for other quantities

_____ Laser Marking

_____ WVDC

_____ Termination Code

The above part number refers to a 100 B Series (case size B) 91 pF capacitor,
 J tolerance (±5%), 500 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and ATC Cap-Pac® packaging.

ATC accepts orders for our parts using designations **with** or **without** the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America ATC Europe ATC Asia
 +1-631-622-4700 • sales@atceramics.com +46 8 6800410 • sales@atceramics-europe.com +86-755-2396-8759 • sales@atceramics-asia.com

ATC 100 B Capacitors: Mechanical Configurations

| ATC SERIES & CASE SIZE | ATC TERM. CODE | MIL-PRF-55681 | CASE SIZE & TYPE | OUTLINES W/T IS A TERMINATION SURFACE | BODY DIMENSIONS INCHES (mm) | | | LEAD AND TERMINATION DIMENSIONS AND MATERIALS | | | |
|------------------------|----------------|---------------|--------------------------------|--|--|----------------------------|---------------------|---|--|----------------------------|-----------------------------|
| | | | | | LENGTH (L) | WIDTH (W) | THICKNESS (T) | OVERLAP (Y) | MATERIALS | | |
| 100B | W | CDR14BG | B Solder Plate | | .110 +.020 -.010 (2.79 +0.51 -.025) | .110 ±.015 (2.79 ±0.38) | .102 (2.59) max. | .015 (0.38) ±.010 (0.25) | Tin/Lead, Solder Plated over Nickel Barrier Termination | | |
| 100B | P | CDR14BG | B Pellet | | .110 +.035 -.010 (2.79 +0.89 -.025) | .110 ±.015 (2.79 ±0.38) | | | Heavy Tin/Lead Coated, over Nickel Barrier Termination | | |
| 100B | T | N/A | B Solderable Nickel Barrier | | .110 +.020 -.010 (2.79 +0.51 -.025) | .110 ±.015 (2.79 ±0.38) | | | RoHS Compliant Tin Plated over Nickel Barrier Termination | | |
| 100B | CA | CDR13BG | B Gold Chip | | .110 +.020 -.010 (2.79 +0.51 -.025) | .110 ±.015 (2.79 ±0.38) | | | RoHS Compliant Gold Plated over Nickel Barrier Termination | | |
| 100B | MS | CDR21BG | B Microstrip | | .135 ±.015 (3.43 ±0.38) | .110 ±.015 (2.79 ±0.38) | .120 (3.05) max. | N/A | Length (L _L) | Width (W _L) | Thickness (T _L) |
| 100B | AR | CDR22BG | B Axial Ribbon | | | | | | .250 (6.35) min. | .093 ±.005 (2.36 ±0.13) | .004 ±.001 (.102 ±.025) |
| 100B | RR | CDR24BG | B Radial Ribbon | | | | | | .145 ±.020 (3.68 ±0.51) | .102 (2.59) max. | .500 (12.7) min. |
| 100B | RW | CDR23BG | B Radial Wire | | | | | | | | |
| 100B | AW | CDR25BG | B Axial Wire | | | | | | | | |

Additional lead styles available: Narrow Microstrip (NM), Narrow Axial Ribbon (NA) and Vertical Narrow Microstrip (H). Other lead lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant. For a complete military catalog, request American Technical Ceramics document ATC 001-818.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
+1-631-622-4700 • sales@atceramics.com

ATC Europe
+46 8 6800410 • sales@atceramics-europe.com

ATC Asia
+86-755-2396-8759 • sales@atceramics-asia.com


ATC 100 B Non-Magnetic Capacitors: Mechanical Configurations

| ATC SERIES & CASE SIZE | ATC TERM. CODE | MIL-PRF-55681 | CASE SIZE & TYPE | OUTLINES W/T IS A TERMINATION SURFACE | BODY DIMENSIONS INCHES (mm) | | | LEAD AND TERMINATION DIMENSIONS AND MATERIALS | | | |
|------------------------|----------------|--------------------|------------------------------|--|--|----------------------------|---------------------|--|---|----------------------------|-----------------------------|
| | | | | | LENGTH (L) | WIDTH (W) | THICKNESS (T) | OVERLAP (Y) | MATERIALS | | |
| 100B | WN | Meets Requirements | B Non-Mag Solder Plate | | .110 +.025 -.010 (2.79) +.064 -.025 | .110 ±.015 (2.79 ±0.38) | .102 (2.59) max. | .015 (0.38) ±.010 (0.25) | Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination | | |
| 100B | PN | Meets Requirements | B Non-Mag Pellet | | .110 +.035 -.010 (2.79) +.089 -.025 | .110 ±.015 (2.79 ±0.38) | | | Heavy Tin/Lead Coated, over Non-Magnetic Barrier Termination | | |
| 100B | TN | Meets Requirements | B Non-Mag Solderable Barrier | | .110 +.025 -.010 (2.79) +.064 -.025 | .110 ±.015 (2.79 ±0.38) | | | RoHS Compliant Tin Plated over Non-Magnetic Barrier Termination | | |
| 100B | MN | Meets Requirements | Non-Mag Microstrip | | .135 ±.015 (3.43 ±0.38) | .110 ±.015 (2.79 ±0.38) | .120 (3.05) max. | N/A | Length (L _L) | Width (W _L) | Thickness (T _L) |
| 100B | AN | Meets Requirements | Non-Mag Axial Ribbon | | | | | | .250 (6.35) min. | .093 ±.005 (2.36 ±0.13) | .004 ±.001 (.102 ±0.25) |
| 100B | FN | Meets Requirements | B Non-Mag Radial Ribbon | | | | | | .145 ±.020 (3.68 ±0.51) | .102 (2.59) max. | N/A |
| 100B | RN | Meets Requirements | B Non-Mag Radial Wire | | | | | | | | |
| 100B | BN | Meets Requirements | B Non-Mag Axial Wire | | | | | | | | |

Additional lead styles available: Narrow Microstrip (DN), Narrow Axial Ribbon (GN) and Vertical Narrow Microstrip (HN). Other lead lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.


Suggested Mounting Pad Dimensions

Case B Vertical Mount

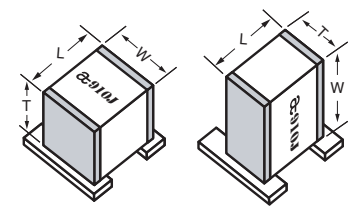


| Cap Value | Pad Size | A Min. | B Min. | C Min. | D Min. |
|---------------|--------------|--------|--------|--------|--------|
| 0.1 pF | Normal | .065 | .050 | .075 | .175 |
| | High Density | .045 | .030 | .075 | .135 |
| 0.2 pF | Normal | .090 | .050 | .075 | .175 |
| | High Density | .070 | .030 | .075 | .135 |
| 0.3 to 510 pF | Normal | .110 | .050 | .075 | .175 |
| | High Density | .090 | .030 | .075 | .135 |
| > 510 pF | Normal | .120 | .050 | .075 | .175 |
| | High Density | .100 | .030 | .075 | .135 |

Horizontal Electrode Orientation



Vertical Electrode Orientation



Horizontal Mount

| All values | Pad Size | A Min. | B Min. | C Min. | D Min. |
|------------|--------------|--------|--------|--------|--------|
| | Normal | .130 | .050 | .075 | .175 |
| | High Density | .110 | .030 | .075 | .135 |

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America

ATC Europe

ATC Asia


+1-631-622-4700 • sales@atceramics.com

+46 8 6800410 • sales@atceramics-europe.com


+86-755-2396-8759 • sales@atceramics-asia.com

ATC 100 B Performance Data


**ESR VS. CAPACITANCE
ATC SERIES 100, CASE B**

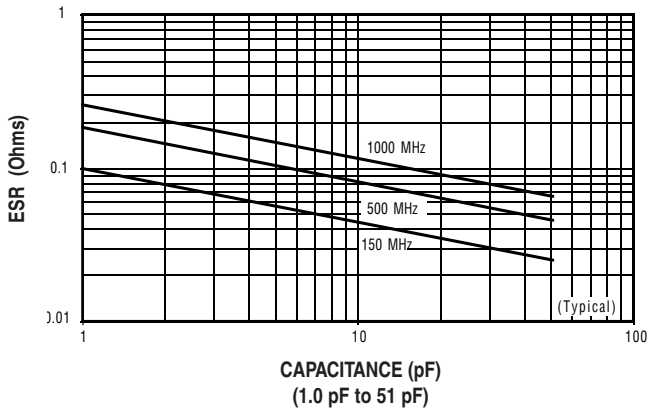


**Q VS. CAPACITANCE
ATC SERIES 100, CASE B**

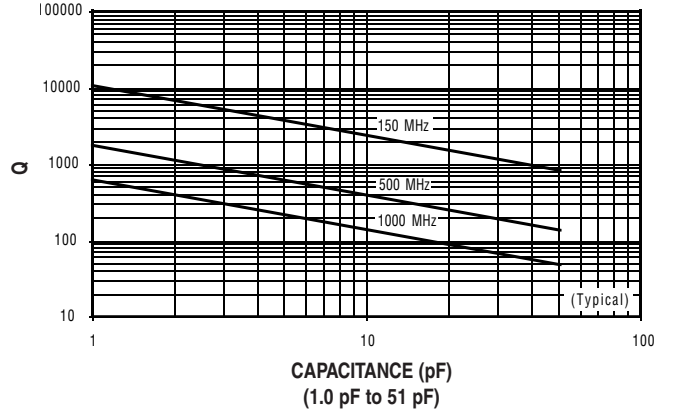


**ESR VS. CAPACITANCE
ATC SERIES 100, CASE B**

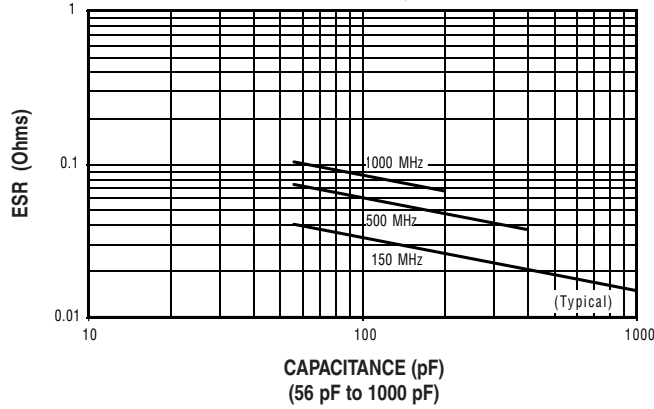


**Q VS. CAPACITANCE
ATC SERIES 100, CASE B**

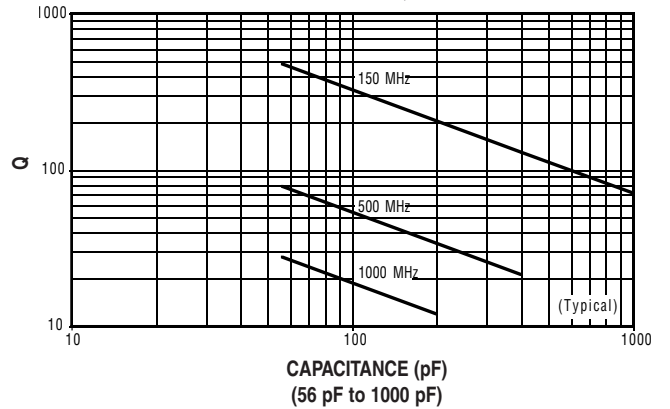

**SERIES RESONANCE VS. CAPACITANCE
ATC SERIES 100, CASE B**

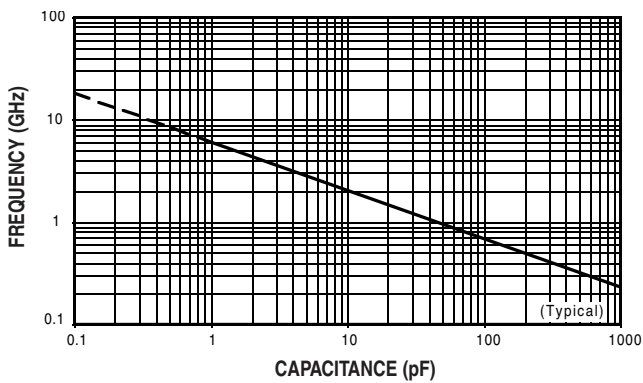

**CAPACITANCE CHANGE VS. TEMPERATURE
ATC SERIES 100, CASE B**

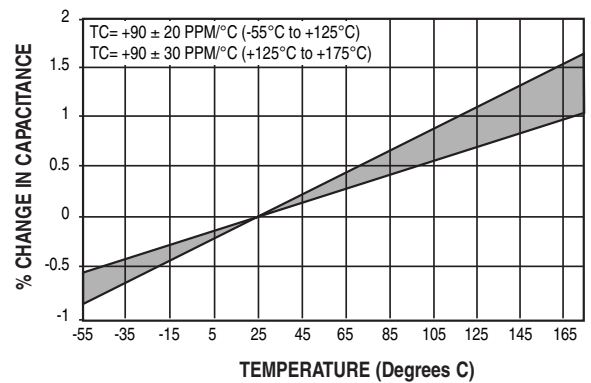

A M E R I C A N T E C H N I C A L C E R A M I C S


ATC North America
+1-631-622-4700 • sales@atceramics.com

ATC Europe
+46 8 6800410 • sales@atceramics-europe.com


ATC Asia
+86-755-2396-8759 • sales@atceramics-asia.com

ATC 100 B Performance Data


**CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE B**

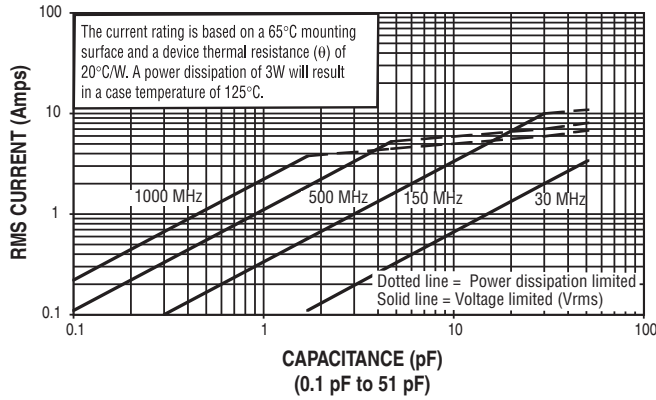


**CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE B**

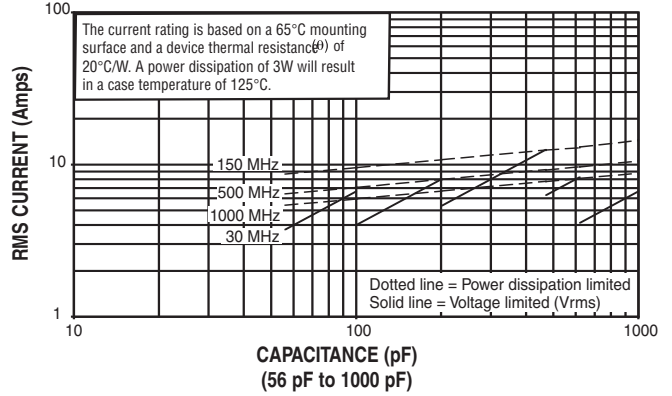

**CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE B, EXTENDED VOLTAGE**

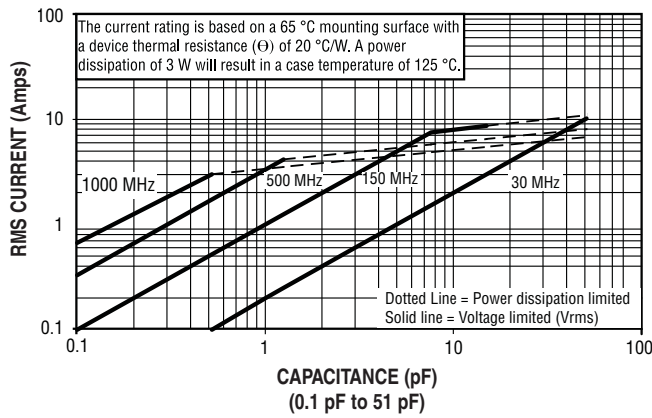

**CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE B, EXTENDED VOLTAGE**

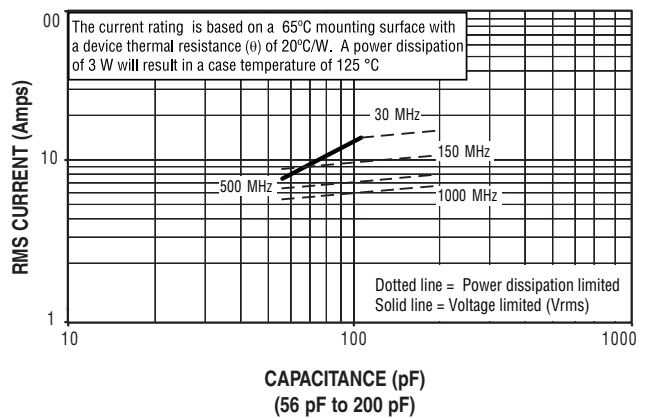

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B; 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 1996 American Technical Ceramics Corp. All Rights Reserved

ATC # 001-807 Rev. L 1/08



AMERICAN TECHNICAL CERAMICS

ATC North America
+1-631-622-4700
sales@atceramics.com

ATC Europe
+46 8 6800410
sales@atceramics-europe.com

ATC Asia
+86-755-2386-8759
sales@atceramics-asia.com



www.atceramics.com